

ATTEN ST-1016/ST-1016-P

Smoke Absorber User Manual

Specification

Item Name	Solder Smoke Absorber
Item Model	ST-1016/ST-1016-P
Power consumption	220V AC/50Hz/22W 110V AC/60Hz/22W
Maximum suction capacity	1.03m ³ /min
Dimensions	103.3*161.8*217.2mm
Filter size	142*142*10mm

Packaging List


User Manual X1, Activated Carbon Filter X1, Solder Smoke Absorber X1



User Manual



Activated Carbon Filter




Solder Smoke Absorber

Instructions

1. Remove widely range of solder smoke

Please adjust two gear keys if removing widely range of solder smoke, Gear 1 is suitable to be used under brighter environment, the LED light is off when pressing Gear 1, Gear 2 is suitable to be used under dark environment, the LED light is on when pressing Gear 2.




1

2


2. Remove close-up solder smoke

Please place this device on the desk as below picture if removing close-up solder smoke, and turn on Gear 1. Comparing with vertical position, horizontal position can provide airflow and efficiency much more than vertical, and is not much suitable for removing widely range of smoke.



2. Install


Please fix the activated carbon filter on the 4pcs of buckle position as picture on the right. please don't operate this device before put into the activated carbon filter.



Care and Maintenance

1. Replace activated carbon filter

The filter absorbs solder fumes and becomes white with clogging. Replace the filter when the suction power is drastically reduced due to clogging, or when the flux smell gets noticeably stronger. (Note: Be careful that moisture, water etc does not get on the filter, or it can't be used.)

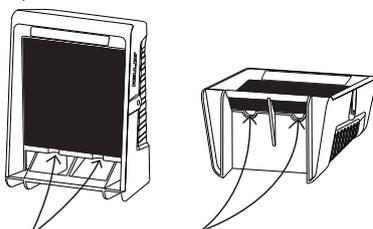

Pull out this filter on the position, with fingers

3

Safety Precaution



WARNING

In order to reduce the risk of fire alarm or electric shock, please never use this device with solid state speed control device at the same time, please cut off power before repairing, or it will lead to electric shock.



CAUTION

- Do not use this produce absorb igniting or explosive gas.
- Keep this product away from wet places.
- Do not make this product wet or use it with wet hands.
- Make sure to turn off the power when this device stopped using or out of use.
- Please turn off the power when replacing parts or not used.
- Keep this product out of children's reach.
- Please replace the power cord by contacting original factory or equivalent person to get rid of danger.
- Please use the accessories from the original factory when replacing the product parts.

深圳市安泰信科技有限公司
SHENZHEN ATTEN TECHNOLOGY CO., LTD

地址: 广东省深圳市光明新区七号路森阳高新科技园2栋8楼
Add: 8 Floor, Building 2, Senyang High-tech Park, No. 7 Road, Guangming District, Shenzhen 518132, China

电话 (Tel): 0755-8602 1389 (总机) 400-998-6633

网址 (Web): www.atten.com.cn (中文) www.atten.com (EN)

邮箱 (Email): sales@atten.com.cn

MADE IN CHINA
CBN030691(B)

4